








Specification for Film Capacitor

1.Part Name

• CBB40 Type metalized capacitor in polypropylene film dielectric

2.Dimensions & shape:

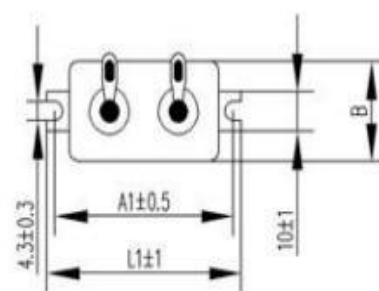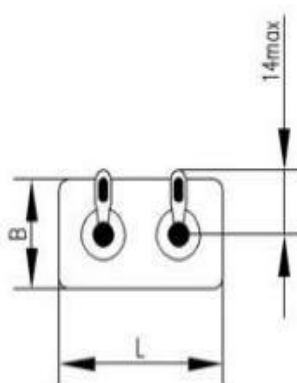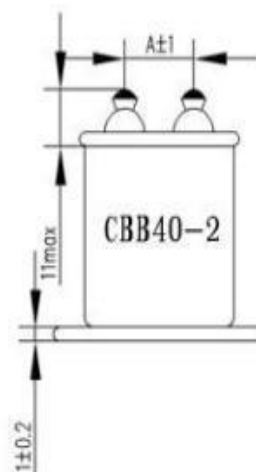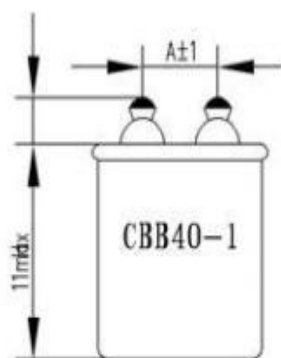



Enclosure No.	Dimension / mm						
	H	L	B	A2	A	A1	L1
1	25	31	11	---	13	39	45
2			16				
3			21				
4			26				
5			31				
6	50	46	11	---	25	54	60
7			16				
8			21				
9			26				
10			31				
11			41	26			
12			46	31			
13			51	36			
14			56	41			
15			61	61			
16			65	65			
17			86	71			

3.Applications

- It is used for the DC/Pulse circuit of electrical equipment.

4.Main characteristics

- Climate type: 55/77/21
- Capacitor tolerance: $\pm 5\%$ (J) , $\pm 10\%$ (K)
- Nominal capacitance (Cn): 0.22uf—30uf
- Dissipation Factor: ≤ 0.004
- Insulated Resistance:
 $UR \leq 400V \geq 1000S$, $UR > 400V \geq 3000S$
- Withstanding Voltage: 1.5UR



2 Xian Xiwuer Electronic & Info. Co., Ltd.

- . Norminal Operating Voltage: 250V— 1600V**
- .Metalized enclosure, hermetic package**

Note: We are available to design and produce customized products.